≙Neckermann 765/382

SERVICE MANUAL

ORION

TV-COLOUR

TV 7109 PIP

LfdNr. 282

Spare parts list
Ersatzteilliste

Chassis 7000
DOLBY PRO LOGIC

Ref./Pos.	Part No. ET-Nr.	Description	Bezeichnung	
	S000807009	**Dolby Pro Logic PCB cpl.**	Dolby Pro Logic Modul cpl.	
	S061961959	Zener diode 10V	Z-Diode 10V	
	S063126169	I.C. TDA2616	IC TDA2616	
	S063363009	I.C. M51132L	IC M51132L	
	S063363309	I.C. M65830BP	IC M65830BP	
	S063363509	I.C. M69032P	IC M69032P	
	S063540479	I.C. HEF4047BT	IC HEF4047BT	
	S067330309	Ceramic resonator CSA 2.00 MG	Keramikresonator CSA 2.00 MG	
	S068070909	Relay SVR 12	Relais SVR 12	
	S068500309	Switch SK 22F01G9	Schalter SK 22F01G9	
	S071013409	External speaker connector	Buchse externer Lautsprecher	

Zentralwerkstatt und
Ersatzteildepot
für ORION-Produkte

Schwalbe
Service & Versand GmbH

Postfach 10 10 26
63264 Dreieich
Max-Planck-Str. 20
63303 Dreieich

Technische Auskunft (tägl. 9-12 Uhr):
☎ Video/Camcorder: (06103) 39 99-62
☎ TV/Audio: (06103) 39 99-66
☎ Fax: (06103) 39 99-88/63

Ersatzteil-Bestellung:
☎ (06103) 39 99-95
Fax (06103) 39 99-79

Service Manual

Nachdruck bzw. Kopieren dieser Unterlagen ist grundsätzlich verboten!

ORION

Chassis 7000
Dolby Pro Logic

Ergänzung zum Manual Best. Nr. 5911

Bestell-Nr.:
6571

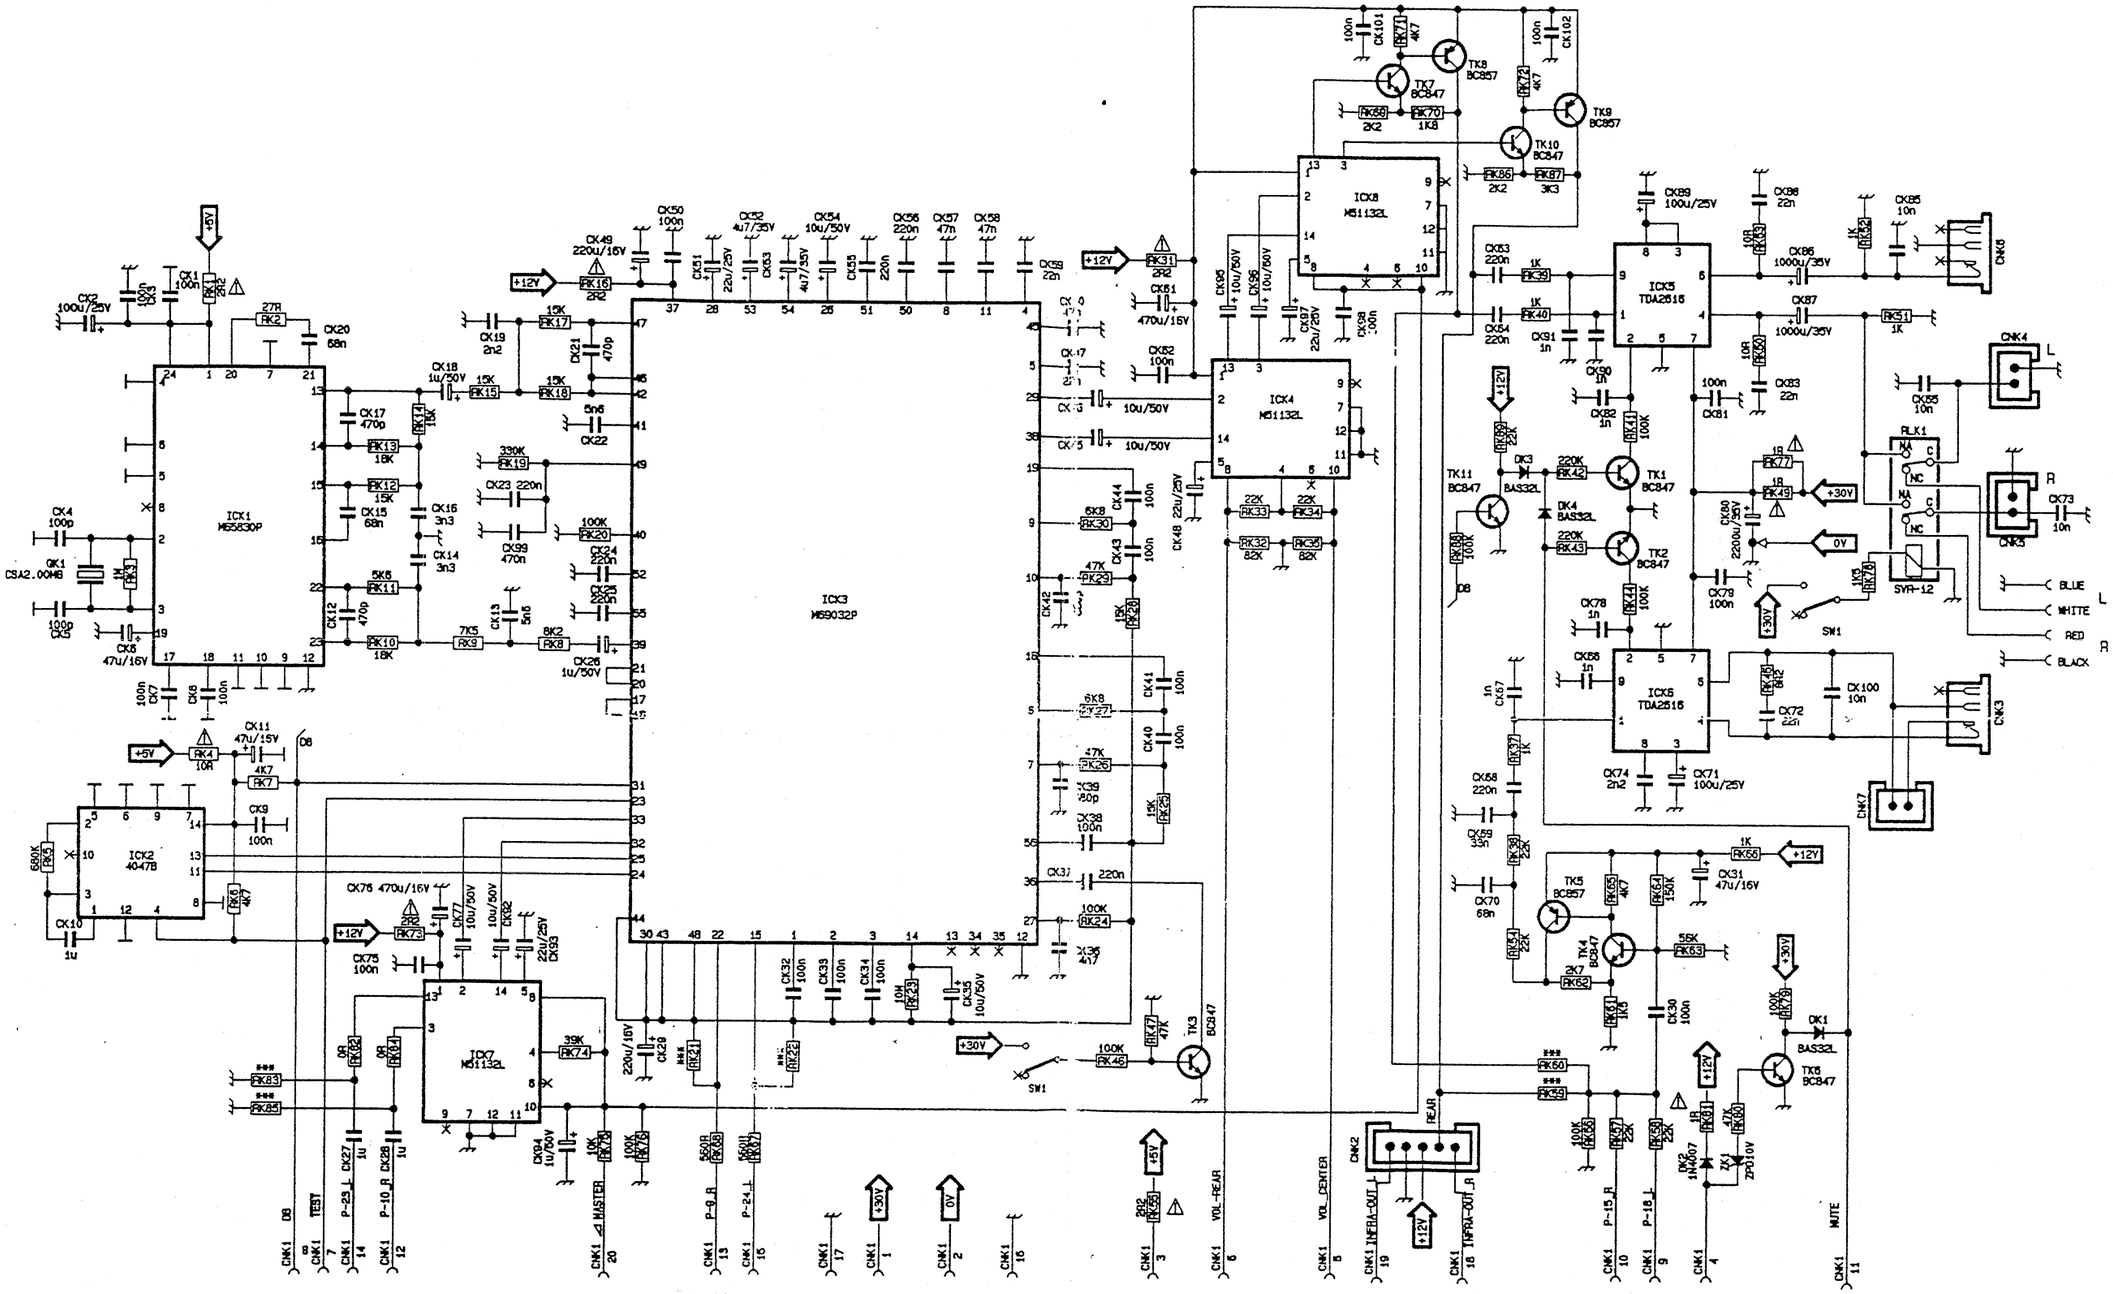

ORION Chassis 7000

SIZE	DIS. Nr.	DOCUMENTO	REV.
B		DOLBY PRO LOGIC DECODER	
SCALA	DATA 2/6/1996	SHEET	

Front-end

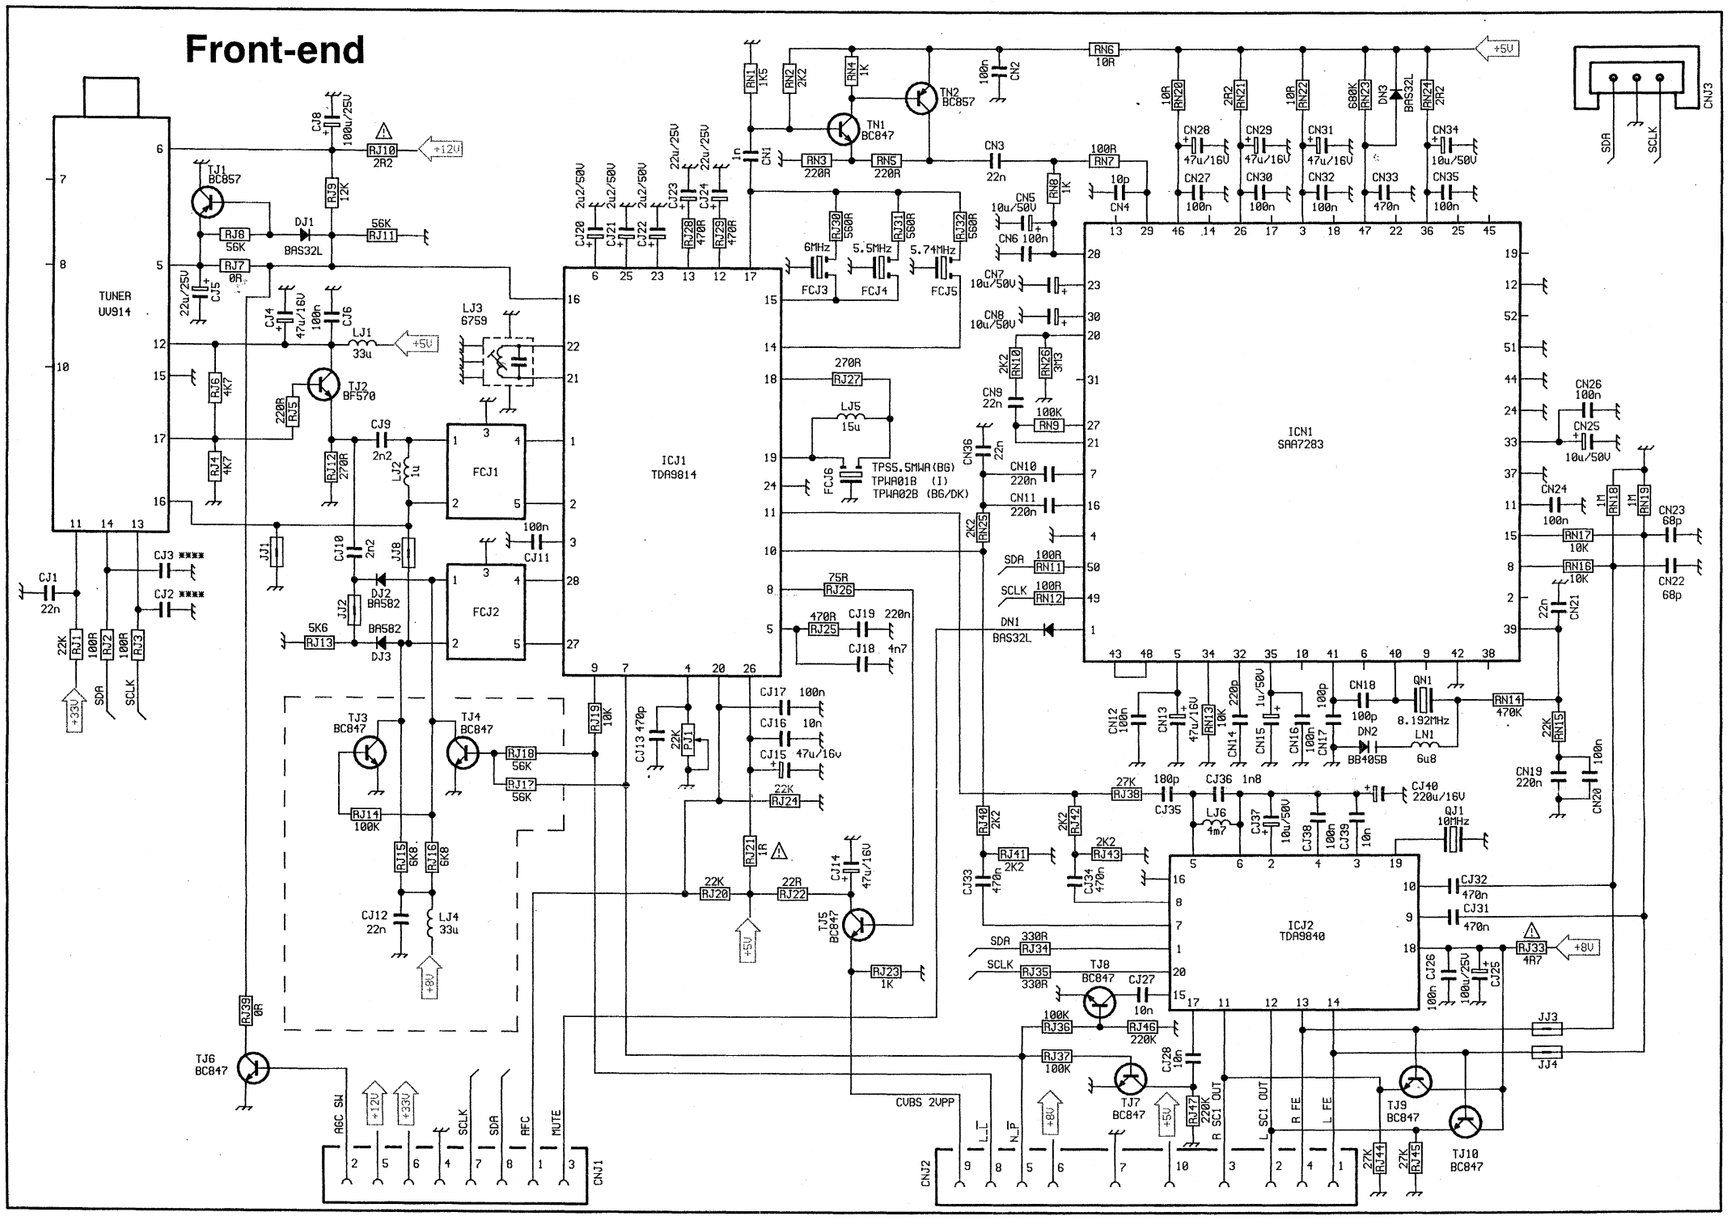

Text

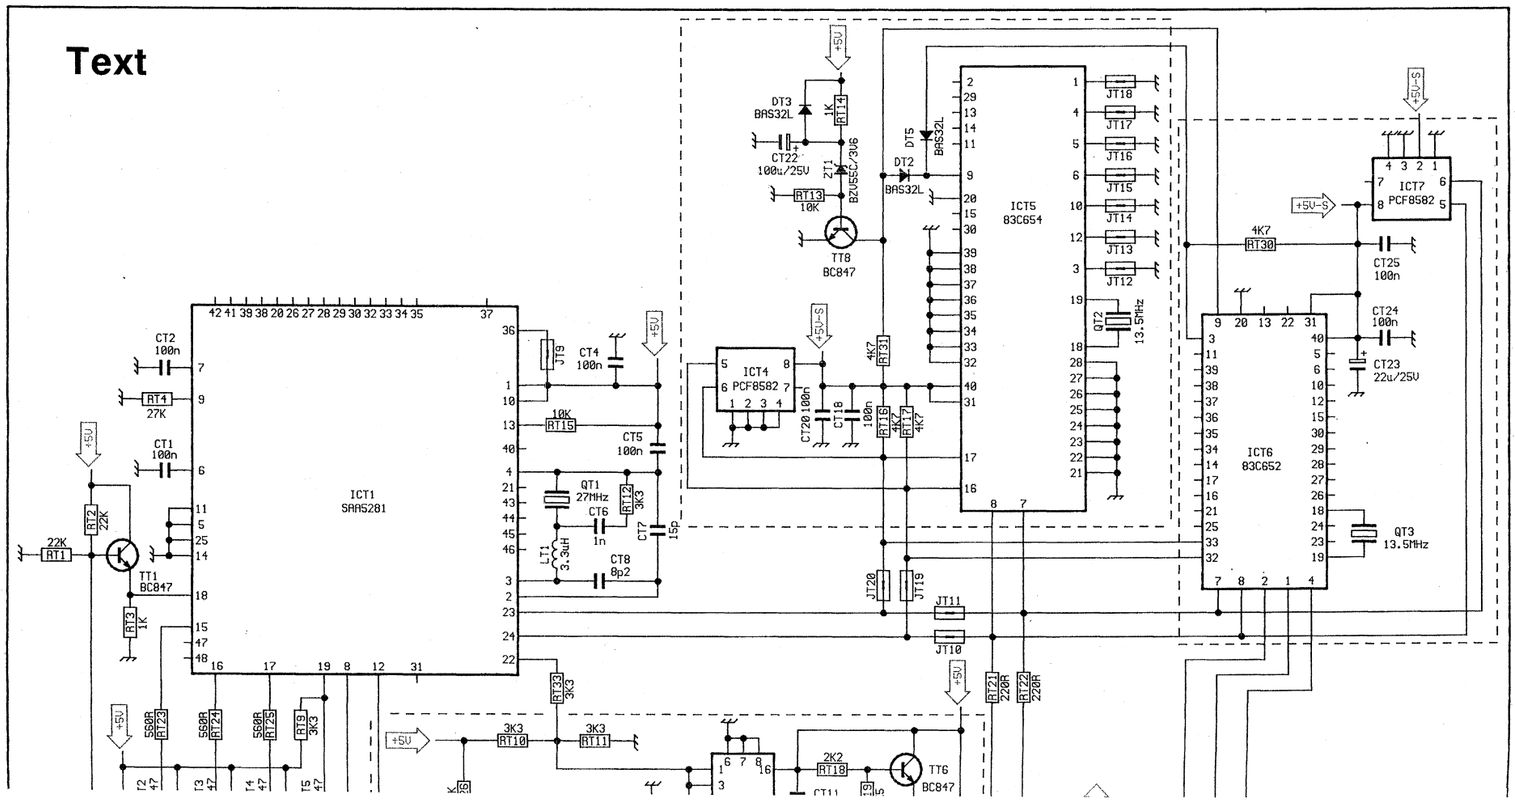

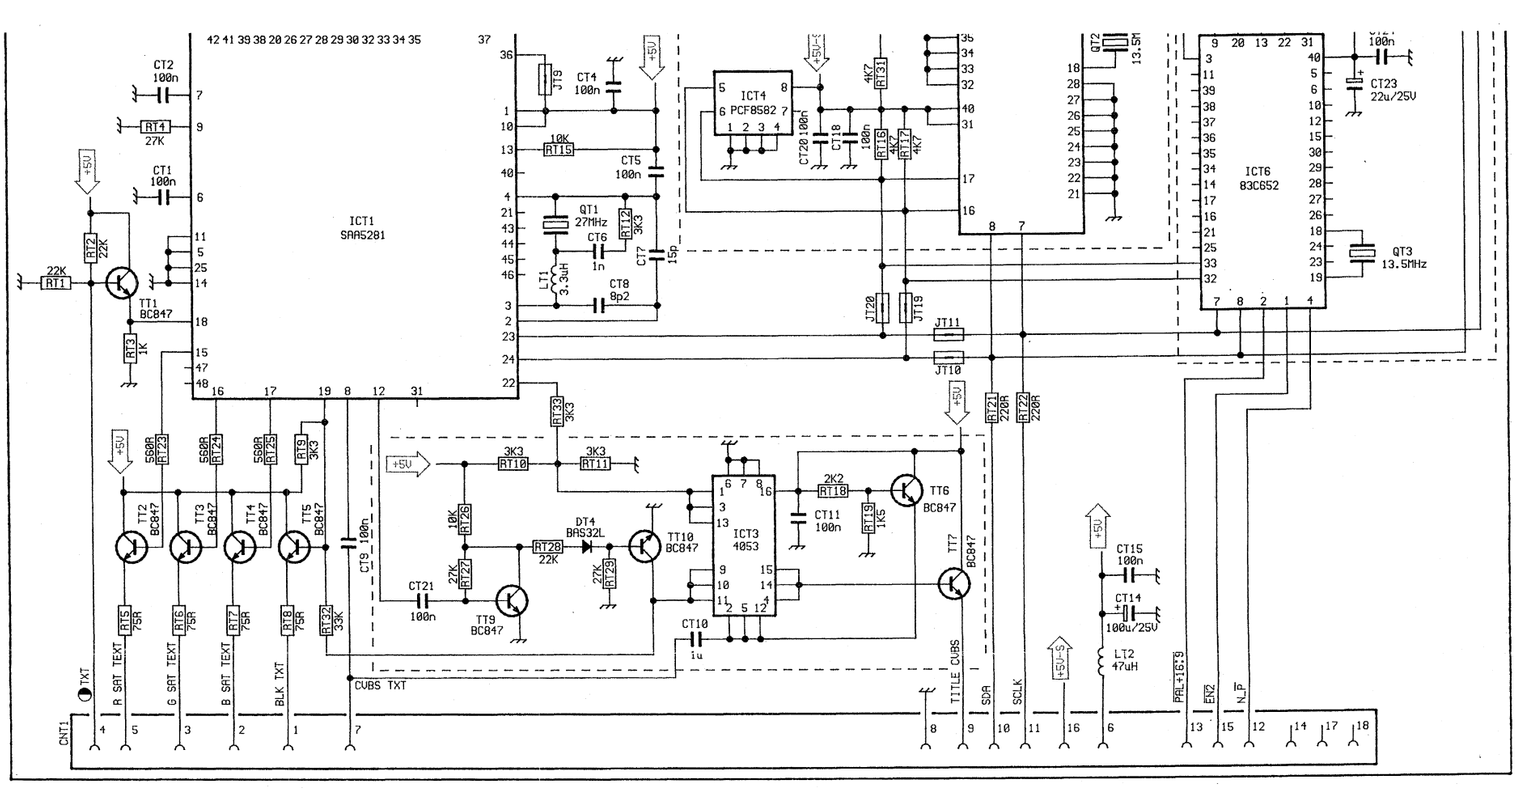
ICT1
SAA5281
ICT4
PCF8582
ICT6
83C652
ICT3
4053
TT1
BC847
TT2
TT3
TT4
TT5
TT6
TT7
TT9
TT10
DT4
BAS32L
QT1
27MHz
QT3
13.5MHz
CT1
CT2
CT3
CT4
CT5
CT6
CT7
CT8
CT9
CT10
CT11
CT14
CT15
CT20
CT21
CT23
RT1
RT2
RT3
RT4
RT5
RT6
RT7
RT8
RT9
RT10
RT11
RT12
RT15
RT16
RT17
RT18
RT19
RT20
RT21
RT22
RT23
RT24
RT25
RT26
RT27
RT28
RT29
RT32
RT33
LT1
LT2
JT10
JT11
JT19
JT20
CNT1
TXT
R SAT TEXT
G SAT TEXT
B SAT TEXT
BLK TXT
CVBS TXT
TITLE CVBS
SDA
SCLK
PAL+16:9
EW2
N_P
+5V
+5V-S

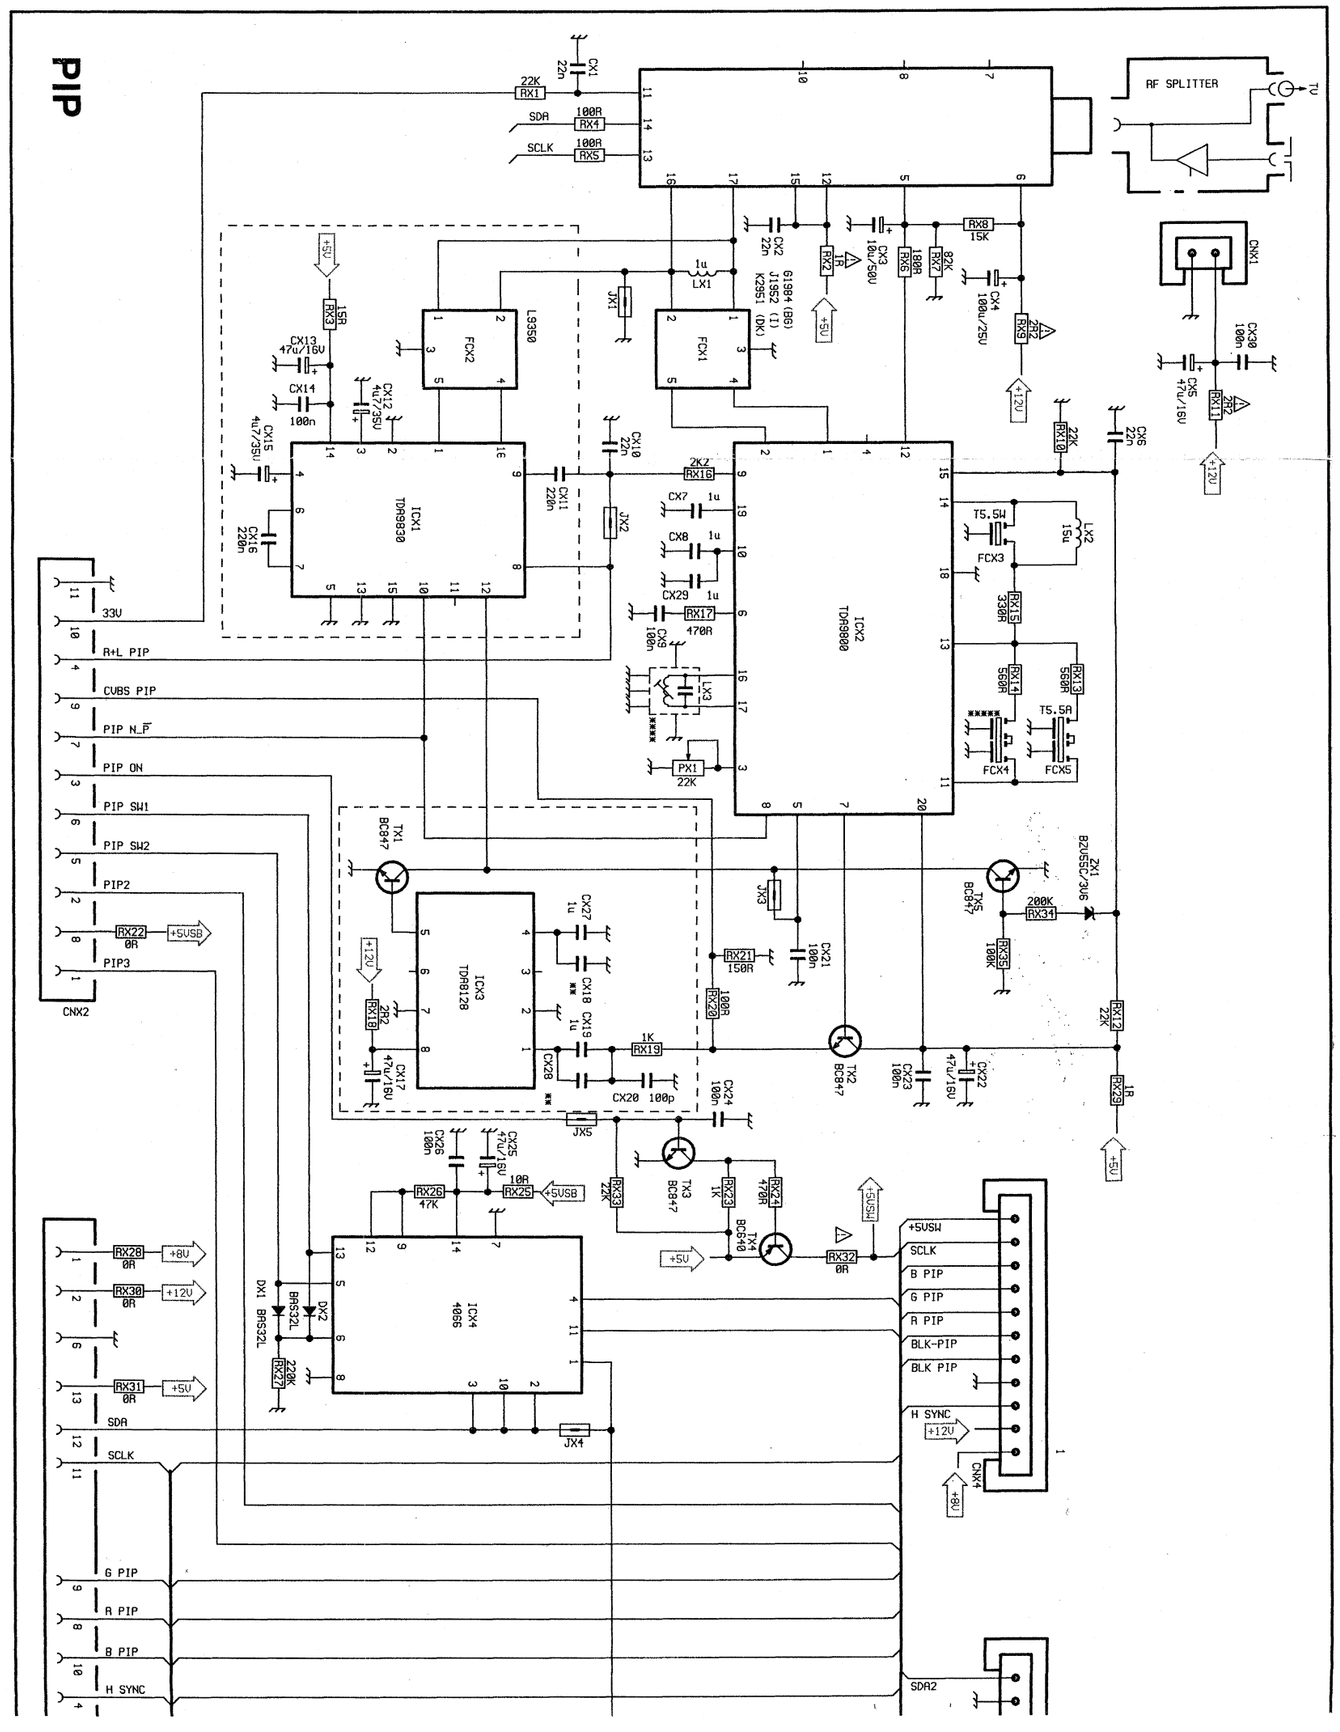
PIP
ICX1
TDA9830
ICX2
TDA9800
ICX3
TDA8128
ICX4
4066
FCX1
FCX2
FCX3
FCX4
FCX5
L3350
TX1
TX2
TX3
TX4
TX5
TX6
ZX1
BZV55C/3V6
DX1
DX2
BAS32L
JX1
JX2
JX3
JX4
JX5
LX1
LX2
LX3
PX1
CNX1
CNX2
CNX4
RF SPLITTER
TV
CX1
CX2
CX3
CX4
CX5
CX6
CX7
CX8
CX9
CX10
CX11
CX12
CX13
CX14
CX15
CX16
CX17
CX18
CX19
CX20
CX21
CX22
CX23
CX24
CX25
CX26
CX27
CX28
CX29
CX30
RX1
RX2
RX3
RX4
RX5
RX6
RX7
RX8
RX9
RX10
RX11
RX12
RX13
RX14
RX15
RX16
RX17
RX18
RX19
RX20
RX21
RX22
RX23
RX24
RX25
RX26
RX27
RX28
RX29
RX30
RX31
RX32
RX33
RX34
RX35
33V
R+L PIP
CVBS PIP
PIP N_P
PIP ON
PIP SW1
PIP SW2
PIP2
PIP3
+5VSW
SCLK
B PIP
G PIP
R PIP
BLK-PIP
BLK PIP
H SYNC
SDA2

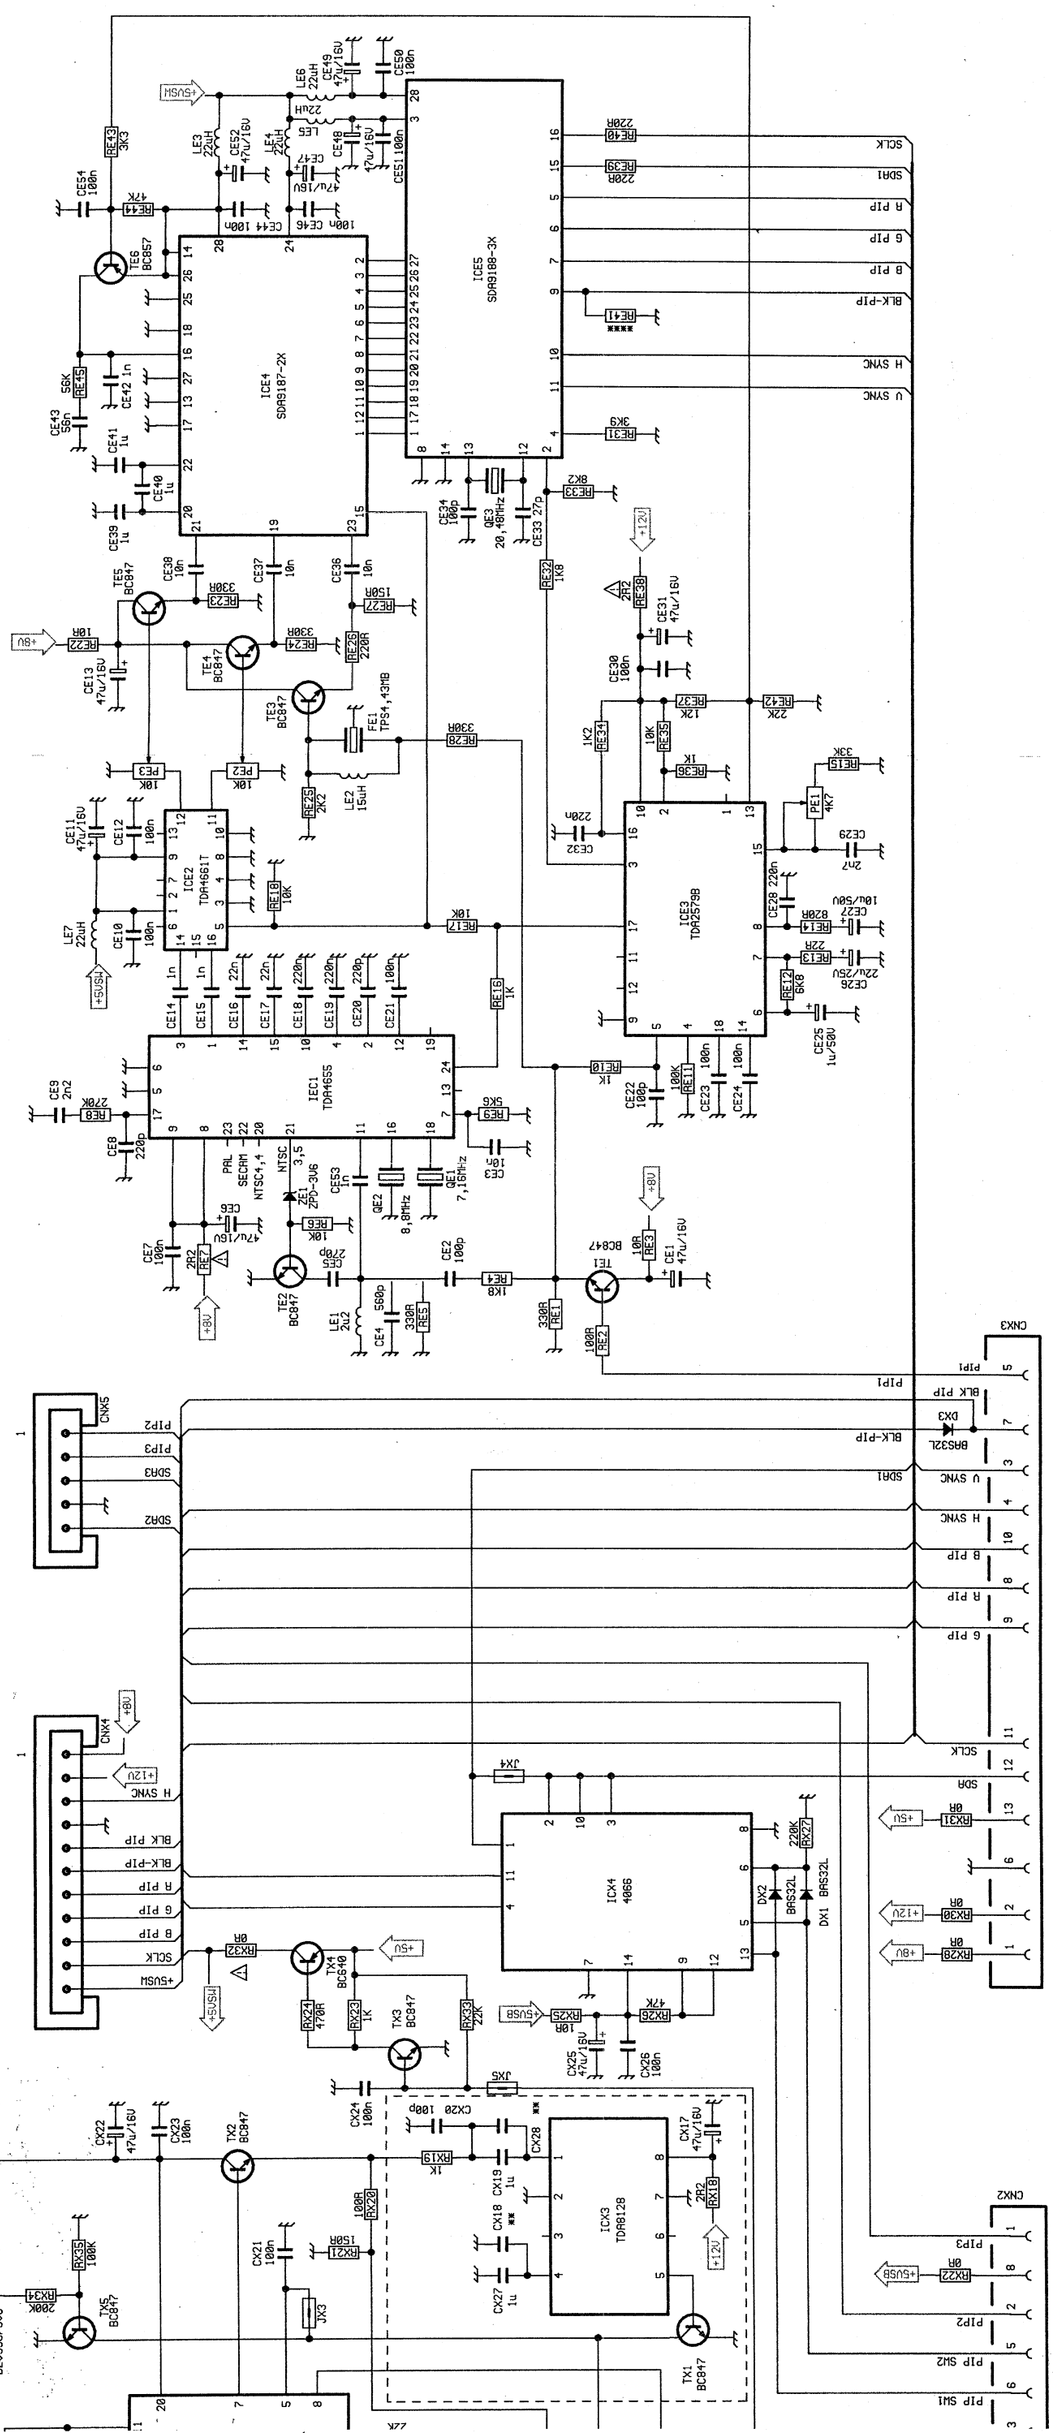
ICE5 SDA9186-3X
ICE4 SDA9187-2X
ICE3 TDA2579B
IEC1 TDA4665S
ICE2 TDA4661T
ICV3 TDA8128
ICX4 4066
SCLK
SDA1
R PIP
G PIP
B PIP
BLK-PIP
H SYNC
V SYNC
+5USW
+12V
+8V
+5V
+5U
CNX3
CNX5
CNX4
CNX2
DX1 BAS32L
DX2 BAS32L
DX3 BAS32L
ZX1 BZV55C/3V6
QE1 7,16MHz
QE2 8,8MHz
QE3 20,48MHz

PIP
TEXT
FRONT END
FRONT END
SAT
SAT
ICA2 uP83C855
ICC1 TEA6415B
ICC2 TDA8376
ICP1 TEA2261
ICS1 TEA6422
ICS2 TDA9860
ICR1 PCF8584
ICP4 TDA8138
ICS3 TDA7050T
ICS5 TDA7050T
TC1 BC847
TC2 BC847
TC3 BC847
TC4 BC847
TR1 BC847
TR2 BC847
TR4 BC847
TR5 BC847
TP1 BC547B
TP2 BC547B
TP5 BC847
TP6 BD436
CNX1
CNX2
CNT1
CNJ1
CNJ2
CNJ3
CNR1
CNR2
CNP1
CNP2
CNP3
CNP4
CNP5 SAT ONLY
CNC1
CNC2
CNS1
SCART
SYS
TCB BC847
TITLE CVBS
PTC1
LP1
LP2
LR1 15u
QR1 12MHz
ZP1 BZX79C/33
ZP2 ZPD3V6
ZR1 ZPD5V1
ZR2 BZV55C/3V6
ZR3 BZV55C/3V6
DR1 1N4148
DR2 BAS32L
DR3 1N4148
DR4 1N4148
DR5 1N4148
DR6 BAS32L
DP1 BA159
DP2 1N4148
DP10 BA159
DP11 BYW95B
DP12 BYW29
DP13 1N4148
DP14 BYD33J
DP15 BYW29
DP16 BYW95C
FRP1
FRP2
ZP4 ZPD6V2
ZP5 ZPD6V2
DS1 BAS32L
DS2 BAS32L
DS3 BAS32L
DS4 BAS32L
DC1 BAS32L
FP1 T2.5AH
JP1
JP2
JP3
JP4
JC1
JC2
JC6
JS1
JS2
QC1 3MS8
QC2 4MS3
RESET
MUTE
PAUSE
ON
SCLK
SDA
AGC SW
PAL+16:9
DB
EN2
SPECIAL
REAR
CENTER
TXT
CVBS SC1 IN
CVBS SC2 IN
Y-SVHS
CVBS SAT
CVBS CINCH
CVBS PIP
CVBS SC1 OUT
CVBS SC2 OUT
CVBS 2UPP
CVBS SVHS
PIP1
PIP2
PIP3
SYS BYPASS
COMPR
V SYNC
H SYNC
AFC
H DRV
COMP
BCL
EW DRV
H FLY
C SVHS
CUT OFF
L SAT IN
R SAT IN
L SC1 IN
R SC1 IN
L SC2 IN
R SC2 IN
L SVHS IN
R SVHS IN
L CINCH IN
R CINCH IN
R+L PIP
L SC2 OUT
R SC2 OUT
DEGAUSSING COIL
ENTMAGNETISIERUNGSSPULE
SMAGNETIZZATORE
220V-240V 50Hz
Power

SAT
CNV2
BLK SAT
BLK TXT
B SAT TXT
G SAT TXT
R SAT TXT
OSD B
OSD G
OSD R
+12V
BLK OSD SAT
+5V-I
BLK OSD UP
SAT ON
IR
TITLE CVBS
V GUARD
ICC2
TDA8376
ICC5 SAA4981
ICC4
TDA4665T
ICC6
TDA4565
ICC3
TDA8395
CTRL 1
CTRL 2
CTRL 3
COMPA
CNC3
FRONT CINCH
CNW3
CNW2
CRT
L SC1 OUT
R SC1 OUT
R SC1 IN
CVBS CINCH
L SC1 IN
R CINCH IN
L CINCH IN
C SVHS
Y-SVHS
L SVHS IN
R SVHS IN
OSD B
OSD R
OSD G
CUT OFF
B
G
R
ICM1
TDA8601
SC1
SC2
CVBS SC1 OUT
R SC1 OUT
L SC1 OUT
B SAT TXT
G SAT TXT
R SAT TXT
B SCART
G SCART
BLK SCART
BLK TXT
CVBS SC2 IN
CVBS SC2 OUT
R SC2 OUT
L SC2 OUT
R SC2 IN
L SC2 IN
SYS BYPASS
CVBS TXT
CNC2
ICS2
TDA9860
ICS4
TDA2616
ICS5
TDA7050T
AUDIO
SPECIAL
MUTE
INFRA OUT L
INFRA OUT R
CNK1
CNS1
CNS2
CNS3
PLSL
PLSR
L FE
R FE
ICF1
TDA8350
ICL1
TDA8140
H DRV
H SYNC
H FLY
PAUSE
V GUARD
V SYNC
EW DRV
CNL1
CNL2
CNV1
TRL2
HEATER
VG2
FOCUS
EHT
BCL
ZL2
BZX79C\8V2
ICW1
TDA8601
SCL
SDA
DB
TEST
DEMB
CENTER

+	RL15	RF8	RF9	RL33	RL32	RL26	RL27	RL20	RL13	CL7	CL12
BLK LINE	4K7	1R	3R3	10R	1R8	10R	10R	1R	1R	2n7	680n+220n
BLK MATRIX	5K6	1R	3R3	10R	1R8	10R	10R	/	R22	2n2	330n+220n
16/9	8K2	/	1R5	3R3	2R2	2R2	3R3	1R	1R	2n7	1u+220n
VIDEOCOLOR	4K7	1R2	/	3R3	2R2	2R2	3R3	1R	1R	2n7	680n+220n

RGB

+	RL15	RF8	RF9	RL33	RL32	RL26	RL27	RL20	RL13	CL7	CL12
BLK LINE	4K7	1R	3R3	10R	1R8	10R	10R	1R	1R	2n7	680n+220n
BLK MATRIX	5K6	1R	3R3	10R	1R8	10R	10R	/	R22	2n2	330n+220n
16/9	8K2	/	1R5	3R3	2R2	2R2	3R3	1R	1R	2n7	1u+220n
VIDEOCOLOR	4K7	1R2	/	3R3	2R2	2R2	3R3	1R	1R	2n7	680n+220n

Chassis Professional 7000

Spare parts list
Lista parti di ricambio — Chassis 7000

Ref./Pos.	Part No. Codice	Description	Descrizione	Price Lit. Prezzo Lit.
	S000547009	**Main PCB 7000 PAL/NTSC cpl. 4:3**	**Chassis 7000 PAL/NTSC cpl. 4:3**	
	S000547209	**Main PCB 7000 PAL/SECAM/NTSC cpl. 4:3**	**Chassis 7000 PAL/SECAM/NTSC cpl. 4:3**	
	S000547509	**Main PCB 7000 PAL/NTSC cpl. 16:9**	**Chassis 7000 PAL/NTSC cpl. 16:9**	
	S000547709	**Main PCB 7000 PAL/SECAM/NTSC cpl. 16:9**	**Chassis 7000 PAL/SECAM/NTSC cpl. 16:9**	
	S017133009	Condensator 330 pF 1000 V	Condensatore 330 pF 1000 V	
	S034332219	Condensator 22 nF 250 V	Condensatore 22 nF 250 V	
	S036211509	Condensator 150 pF 2000 V	Condensatore 150 pF 2000 V	
	S036222709	Condensator 2,7 nF 2000 V	Condensatore 2,7 nF 2000 V	
	S036228209	Condensator 8,2 nF 2000 V	Condensatore 8,2 nF 2000 V	
	S047001009	Fusible resistor 1 Ohm	Resistenza sicurezza 1 Ohm	
	S047004709	Fusible resistor 4,7 Ohm	Resistenza sicurezza 4,7 Ohm	
	S047010009	Fusible resistor 10 Ohm	Resistenza sicurezza 10 Ohm	
	S048002209	Fusible resistor 2,2 Ohm	Resistenza sicurezza 2,2 Ohm	
	S048005609	Fusible resistor 5,6 Ohm	Resistenza sicurezza 5,6 Ohm	
	S048222009	Fusible resistor 2,2 KOhm	Resistenza sicurezza 2,2 KOhm	
	S053910279	Wire wound resistor 27 Ohm 3 W	Resistenza a filo 27 Ohm 3 W	
	S055408209	Wire wound resistor 5,6 Ohm 7 W	Resistenza a filo 5,6 Ohm 7 W	
	S061284619	Diode BA 159	Diodo BA 159	
	S061303209	Diode BYW 96D	Diodo BYW 96D	
	S061316879	Diode BY 228	Diodo BY 228	
	S061401339	Diode BYD 33 J	Diodo BYD 33 J	
	S061961409	Zener diode 5,1 V	Diodo zener 5,1 V	
	S061961619	Zener diode 6,8 V	Diodo zener 6,8 V	
	S061961709	Zener diode BZV 85C33	Diodo zener BZV 85C33	
	S061961819	Zener diode 8,2 V	Diodo zener 8,2 V	
	S061963019	Zener diode 33 V	Diodo zener 33 V	
	S061963309	Zener diode 51 V	Diodo zener 51 V	
	S062530009	Transistor BD 436	Transistor BD 436	
	S062756109	Transistor S2000AF	Transistor S 2000AF	
	S063126169	I.C. TDA 2616	Circuito integrato TDA 2616	
	S063145669	I.C. TDA 4566	Circuito integrato TDA 4566	
	S063164159	I.C. TEA 6415C	Circuito integrato TEA 6415C	
	S063164229	I.C. TEA 6422	Circuito integrato TEA 6422	
	S063170519	I.C. TDA 7050T	Circuito integrato TDA 7050T	
	S063181389	I.C. TDA 8138A	Circuito integrato TDA 8138A	
	S063181409	I.C. TDA 8140	Circuito integrato TDA 8140	

Ref./Pos.	Part No. Codice	Description	Descrizione	Price Lit. Prezzo Lit.
	S063183509	I.C. TDA 8350Q	Circuito integrato TDA 8350Q	
	S063183569	I.C. 87C055 (uP SEI)	Circuito integrato 87C055 (uPSEI)	
	S063183769	I.C. TDA 8376	Circuito integrato TDA 8376	
	S063198609	I.C. TDA 9860	Circuito integrato TDA 9860	
	S063210509	I.C. L 7808CV	Circuito integrato L 7808CV	
	S063285949	I.C. ST 24C04 AB1 (4K)	Circuito integrato ST 24C04 AB1 (4K)	
	S063349819	I.C. SAA 4981 (16:9 only)	Circuito integrato SAA 4981 (solo 16:9)	
	S063183959	I.C. TDA8395 (SECAM only)	Circuito integrato TDA8395 (solo SECAM)	
	S063546659	I.C. TDA 4665T	Circuito integrato TDA 4665T	
	S063586019	I.C. TDA 8601T	Circuito integrato TDA 8601T	
	S065621409	Flyback transformer 7000	Trasformatore EAT 7000	
	S066900159	Quarz 3,58 MHz	Quarzo 3,58 MHz	
	S066900259	Quarz 4,43 MHz	Quarzo 4,43 MHz	
	S066901209	Quarz 12 MHz	Quarzo 12 MHz	
	S067071009	E/W coil 13,5 mH	Bobina choke E/W 13,5 mH	
	S067081009	Bridge coil AT 4043/100	Bobina ponte AT 4043/100	
	S067081409	Linearity coil	Bobina linearità	
	S071013409	External speaker connector	Presa altoparlante supplementare	
	S071014209	SCART connector	Presa SCART	
	S071015409	Double vertical audio RCA cinch	Doppia presa RCA audio verticale	
	S071020009	S-VHS connector 4 pole	Presa S-VHS 4 poli	
	S000557009	**IF Video/audio PCB cpl. (A2)**	**Modulo FI video/audio cpl. (A2)**	
	S000557109	**IF Video/audio PCB cpl. (A2/NICAM)**	**Modulo FI video/audio (A2/NICAM)**	
	S000557129	**IF Video/audio PCB cpl. (A2/NICAM/AM)**	**Modulo FI video/audio (A2/NICAM/AM)**	
	S000557119	**IF Video/audio PCB cpl. (NICAM)**	**Modulo FI video/audio (NICAM)**	
	S063598140	I.C. TDA 9814T	Circuito integrato TDA 9814T	
	S063598409	I.C. TDA 9840T	Circuito integrato TDA 9840T	
	S063372839	I.C. SAA 7283	Circuito integrato SAA 7283	
	S066900409	Quarz 10 MHz	Quarzo 10 MHz	
	S067320709	SAW filter G3964M	Filtro SAW G3964M	
	S067321509	SAW filter G9353M	Filtro SAW G9353M	
		SAW filter	Filtro SAW	
		SAW filter	Filtro SAW	
	S067400529	Ceramic filter SFT 5,5 MA	Filtro ceramico SFT 5,5MA	
	S067400539	Ceramic filter SFT 5,74 MA	Filtro ceramico SFT 5,74 MA	
	S067401089	Ceramic filter SFT 6,0 MA	Filtro ceramico SFT 6,0 MA	
	S067401109	Ceramic filter SFT 6,5 MA	Filtro ceramico SFT 6,5 MA	
	S067401059	Ceramic filter TPS 5,5 MWA	Filtro ceramico TPS 5,5 MWA	
	S067400009	Ceramic filter TPWA 01B	Filtro ceramico TPWA 01B	
	S067407809	Coil	Bobina	

Ref./Pos.	Part No. Codice	Description	Descrizione	Price Lit. Prezzo Lit.
	S067430009	Choke 4,7 mH 2%	Choke 4,7 mH 2%	
	S069024409	Tuner	Tuner	
	S000567509	**Power PCB 7000 cpl.**	**Modulo Power 7000 cpl.**	
	S014182009	Condensator 820 pF NPO	Condensatore 820 pF NPO	
	S017133009	Condensator 330 pF 1000 V	Condensatore 330 pF 1000 V	
	S017222009	Condensator 2,2 nF 1000 V	Condensatore 2,2 nF 1000 V	
	S020222009	Condensator 2,2 nF 4000 V	Condensatore 2,2 nF 4000 V	
	S029621209	Condensator 1,2 nF 1%	Condensatore 1,2 nF 1%	
	S030236809	Condensator 68 nF 250 VAC	Condensatore 68 nF 250 VAC	
	S030242209	Condensator 220 nF 250 VAC	Condensatore 220 nF 250 VAC	
	S034322219	Condensator 2,2 nF 250 VAC	Condensatore 2,2 nF 250 VAC	
	S047003309	Fusible resistor 3,3 Ohm	Resistenza sicurezza 3,3 Ohm	
	S053051009	Safety resistor 1 MOhm VR37	Resistenza 1 MOhm VR37	
	S053210709	Safety resistor 4,7 MOhm VR68	Resistenza 4,7 MOhm VR68	
	S054000279	Wire wound resistor 0,27 Ohm 3 W	Resistenza a filo 0,27 Ohm 3 W	
	S055491009	Wire wound resistor 1 Kohm 9 W	Resistenza a filo 1 KOhm 9 W	
	S056590209	NTC resistor 4,7 Ohm	Resistenza NTC 4,7 Ohm	
	S056591909	PTC resistor	Resistenza PTC	
	S061111329	Diode 1N4007	Diodo 1N4007	
	S061284619	Diode BA159	Diodo BA159	
	S061300509	Diode BYW29/200	Diodo BYW29/200	
	S061302409	Diode BYW95B	Diodo BYW95B	
	S061302609	Diode BYW95C	Diodo BYW95C	
	S061401339	Diode BYD33 J	Diodo BYD33 J	
	S061912239	Zener diode 6,2 V	Diodo zener 6,2 V	
	S061961079	Zener diode 3,6 V	Diodo zener 3,6 V	
	S062756109	Transistor S 2000AF	Transistor S 2000AF	
	S063164509	I.C. TEA 2261	Circuito integrato TEA 2261	
	S063411019	Optocoupler TCDT1101GB	Fotoaccoppiatore TCDT1101GB	
	S065707109	Power switch transformer 7000	Trasformatore SMT 7000	
	S066541709	Line filter	Filtro rete	
	S070506309	Fuse T 2,5A H	Fusibile T 2,5A H	
	S087171509	Security cover	Copertura isolante	
	S000677209	**RGB Amplif. PCB cpl.**	**Modulo Amplif. RGB cpl.**	
	S017233009	Condensator 3,3 nF 1000 V	Condensatore 3,3 nF 1000 V	
	S035931019	Condensator 10 nF 1000 V	Condensatore 10 nF 1000 V	
	S040590229	Elko 2,2 uF 250 V	Condensatore elettrolitico 2,2 uF 250 V	
	S061281059	Diode BAV 103-GS08	Diodo BAV 103-GS08	
	S062740869	Transistor BF 871	Transistor BF 871	

Ref./Pos.	Part No. Codice	Description	Descrizione	Price Lit. Prezzo Lit.
	S063151019	I.C. TEA 5101A	Circuito integrato TEA 5101A	
	S070001209	CRT socket	Zoccolo cinescopio	
	S070001609	CRT socket (dynamic focus only)	Zoccolo cinescopio (solo fuoco dinamico)	
	S000747139	**Teletext TOP/FLOF/ATS PCB cpl.**	**Modulo Televideo 7000 TOP/FLOF/ATS cpl.**	
	S063185719	I.C. ST 24C02 (2k)	Circuito integrato ST 24C02 (2K)	
	S063283519	I.C. 87C652-4N40 (uP ATS)	Circuito integrato 87C652-4N40 (uP ATS)	
	S063283709	I.C. P83C654 FBP/0541 CTV988	Circuito integrato P83C654 FBP/0541 CTV988	
	S063285949	I.C. ST 24C04 AB1 (4K)	Circuito integrato ST 24C04 AB1 (4K)	
	S063352810	I.C. SAA 5281 P/E	Circuito integrato SAA 5281 P/E	
	S063574009	I.C. 74HC4053D	Circuito integrato 74HC4053D	
	S066901209	Quarz 12 MHz	Quarzo 12 MHz	
	S066902709	Quarz 27 MHz	Quarzo 27 MHz	

Spare parts list
Ersatzteilliste

TV 2807 / 2816 PIP/ 8201 / 8295 PIP

Chassis Professional 7000

Ref./Pos.	Ersatzeil-NR.	Description	Bezeichnung
	S000847029	Manuals controls PCB cpl	Bedienplatine komplett
	S062000409	LED diode red/green	LED rot/grün
	S068057009	Mains switch	Netzschalter
	S068056309	Pusch EKPT 1105 S	Schalter EKPT 1105 S
	S068149109	IR receiver TFMS 5360	Infrarotempfänger TFMS 5360
	S071015309	Earphone jack	Kopfhörerbuchse
	S071020109	RCA jack white	Chinchbuchse weis
	S071020119	RCA jack red	Chinchbuchse rot
	S071020129	RCA jack yellow	Chinchbuchse gelb
	S078970009	Manuals controls holder	Halter Bedienteil
	S079070009	Door	Tür
	S082811409	Door holder	Türhalter
	S082900009	Door push-push block	Türöffner
	S083307009	Mains switch button	Knopf Netzschalter
	S007865359	Cabinet front	Gehäusefront (TV 8201/8295)
	S007864609	Cabinet front	Gehäusefront (TV 2807/2816)
	S078154309	Cabinet	Mittelgehäuse (TV 8201/8295)
	S078145009	Cabinet	Mittelgehäuse (TV 2807/2816)
	S080154309	Back cover	Gehäuserückwand
	S060332009	CRT 32" W76EDX013X101	Bildröhre W76EDX013X101 (TV 8201/8295)
	S060328509	CRT 28" W66EDX013X010	Bildröhre W66DX013X010 (TV 2807/2616)
	S068270109	Transmitter 7000	Fernbedienung 7000
	S073173509	Speaker 8 Ohm	Lautsprecher 8 Ohm
	S073173109	Woofer speaker 8 Ohm	Baßlautsprecher 8 Ohm
	S000887009	Subwoofer box cpl.	Lautsprecherbox komplett
	S087170009	Chassis holder side	Chassishalter Seite
	S087170509	Chassis holder front	Chassishalter Front
	S087171009	Chassis rear connector cover	Buchsenplatte

Spare parts list
Ersatzteilliste

TV 735 / 755S
Chassis Professional 7000

Ref./Pos.	Ersatzeil-NR.	Description	Bezeichnung
	S000847019	Manuals controls PCB cpl.	Bedienplatine komplett
	S062000409	LED diode red/green	LED rot/grün
	S068055309	Mains switch	Netzschalter
	S068056309	Pusch EKPT 1105 S	Schalter EKPT 1105 S
	S068149109	IR receiver TFMS 5360	Infrarotempfänger TFMS 5360
	S071015309	Earphone jack	Kopfhörerbuchse
	S078949519	Manuals controls holder	Halter Bedienteil
	S079049409	Door	Tür
	S083305009	Mains switch button	Knopf Netzschalter
	S091041609	Mains switch spring	Feder Netzschalter
	S007865439	Cabinet front	Gehäusefront (TV 735)
	S007865469	Cabinet front	Gehäusefront (TV 755S)
	S078154309	Cabinet	Mittelgehäuse
	S080154209	Back cover	Gehäuserückwand
	S060328019	CRT 28" A66EAK71X01	Bildröhre A66EAK71X01 (TV 735)
	S060328309	CRT 28" A66EAK252X11	Bildröhre A66EAK252X11 (TV 755S)
	S068270109	Transmitter 7000 ORION	Fernbedienung 7000
	S073173409	Speaker 8 Ohm	Lautsprecher 8 Ohm
	S087170009	Chassis holder side	Chassishalter Seite
	S087170509	Chassis holder front	Chassishalter Front
	S087171009	Chassis rear connector cover	Buchsenplatte

Spare parts list
Ersatzteilliste

TV 8607 PIP
Chassis Professional 7000

Ref./Pos.	Ersatzeil-NR.	Description	Bezeichnung
	S000847039	Manuals controls PCB cpl.	Bedienplatine komplett
	S000834309	IR receiver PCB cpl.	Infrarotempfängerplatine komplett
	S062000409	LED diode red/green	LED rot/grün
	S068055309	Mains switch	Netzschalter
	S068056309	Pusch EKPT 1105 S	Schalter EKPT 1105 S
	S068149109	IR receiver TFMS 5360	Infrarotempfänger TFMS 5360
	S071015309	Earphone jack	Kopfhörerbuchse
	S078941709	Manuals controls holder	Halter Bedienteil
	S079041509	Door	Tür
	S083304209	Mains switch button	Knopf Netzschalter
	S091041709	Mains switch spring	Feder Netzschalter
	S007867109	Cabinet front	Gehäusefront
	S078171009	Cabinet	Mittelgehäuse
	S078171109	Subwoofer cover	Lautsprecherbox
	S080141909	Back cover	Gehäuserückwand
	S079471009	Front glass	Scheibe
	S060334109	CRT 34" A79ECU33X01	Bildröhre A79ECU33X01
	S068270109	Transmitter 7000 ORION	Fernbedienung 7000
	S073172209	Speaker 8 Ohm	Lautsprecher 8 Ohm
	S087170009	Chassis holder side	Chassishalter Seite
	S087170509	Chassis holder front	Chassishalter Front
	S087171009	Chassis rear connector cover	Buchsenplatte